



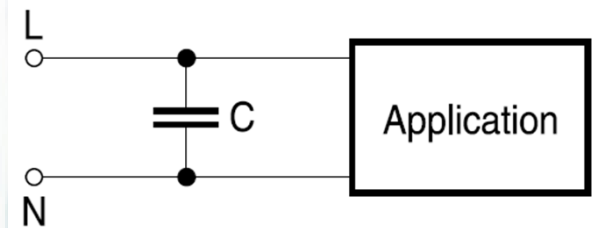

EMI Suppression capacitors

EMI Suppression capacitors

PCX2 339

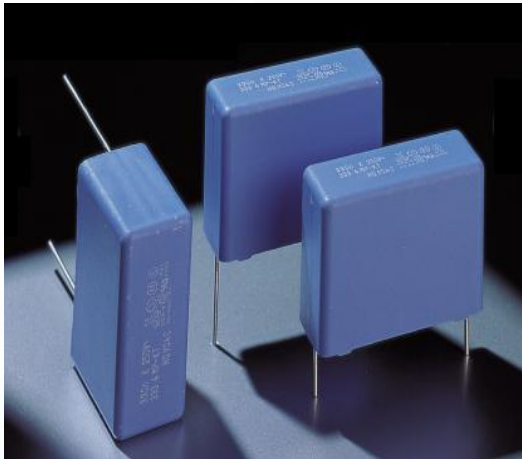

FEATURES

- ❖ 10.0 to 37.5 mm lead pitch
- ❖ Consist of a low-inductive wound cell of Metallized Polypropylene film, potted in a flame retardant case

APPLICATION

- ❖ For X2-electromagnetic interference suppression
- ❖ Specially designed to meet the NEW REQUIREMENTS in new IEC 60384-14 specification(3rd edition)/EN 60384-14 requiring for X2 a 2.5kV peak pulse voltage test

QUICK REFERENCE DATA

Dielectric	Metallized polypropylene
Capacitance range	0.001uF to 10uF
Capacitance tolerance	10%, 20%
Lead spacing	10.0mm / 15.0mm / 22.5mm / 27.5mm / 37.5mm
Rated voltage range	305 Vac
Temperature range	-55°C ~ +110°C
Reference	IEC 60384-14
Potting & Encapsulation material	Qualified in accordance with UL94V-0
Safety approvals	UL 60384-14 & CSA E60384-14:09(cUL) ENEC, CQC EK (0.1uF ~ 3.0uF)