


Capacitor as PCX2 339.....

acc. to Type spec. QSN-075-51

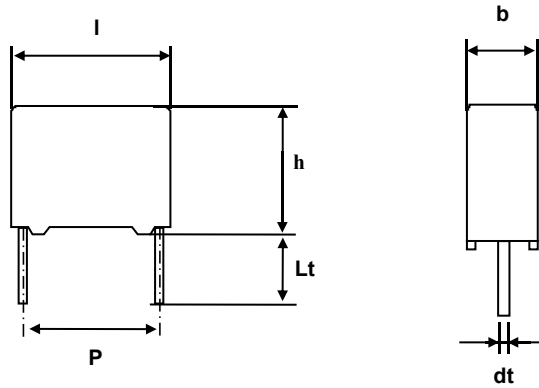

$$dt = 0.8 \pm 0.08 / -0.05 \text{ mm}$$

Voltage V~	Cap. μF	Code PCX2 339	C-tol.	Dimensions b x h x l mm	P mm	Lt mm
305	2.2	S6A001	$\pm 10 \%$	16.5 x 22.0 x 26.0	22.5 ± 0.4	3.4 ± 0.3

CAPACITOR SAME AS PCX2 339JF1225

<BUT>

- Automotive (AEC-Q200 Qualified)

- $LT 3.4 \pm 0.3$

- PACKING METHOD (Arrange)

Code (PCX2 339)	Packing method	Sponge	SPQ (Folding plate)	PQ (Outer box)
S6A001	8242 450 40134	8242 456 30071	90 (8204 116 60121)	450 (8242 451 30701)

- Test Requirements

See PCX2 339S6A....(sh. 190-1)

부서	제품개발1팀	Type Specification				최초작성일	15-04-08
작성	김 세 지	MKP RADIAL POTTED CAPACITORS (만도)	PCX2 339S6A001			개정 No	2
승인	강 문 현					190-1	of page

(C) PILKOR ELECTRONICS

For part lists see PCX2 339JF1225

Include :

Delete :

- Cell code ; 4342 485 S0091

For manufacturing instruction see PCX2 339JF1225 However :

<BUT>

- LOA

1) Welding depth ; 0.5 ± 0.1 mm

2) Pull off force ≥ 1000 g

3) Liquid epoxy ; 770D (1342 431 10224 - Resin : SE-770 UMB D
1342 431 10225 - Hardener : MH-770D)

For AEC capacitor instruction see below....

- PCX2 339S6A001 sh. 100 Survey of Document
- PCX2 339S6A001 sh. 101-1 변경기록서
- PCX2 339S6A001 sh. 260 작업표준서
- PCX2 339S6A001 sh. 261 공정흐름도
- PCX2 339S6A001 sh. 370 DFMEA
- PCX2 339S6A001 sh. 371 PFMEA
- PCX2 339S6A001 sh. 372 Control Plan

부서	제품개발1팀	Manufacturing Specification			최초작성일	15-04-08
작성	김 세 지	MKP RADIAL POTTED CAPACITORS (만도)	PCX2 339S6A001		개정 No	2
승인	강 문 현				260-1	of page

(C) PILKOR ELECTRONICS